



MODEL SMP-120W

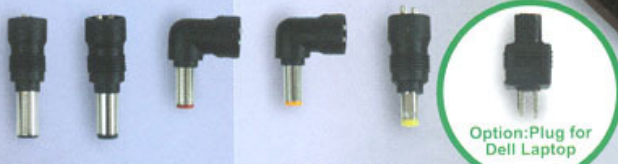

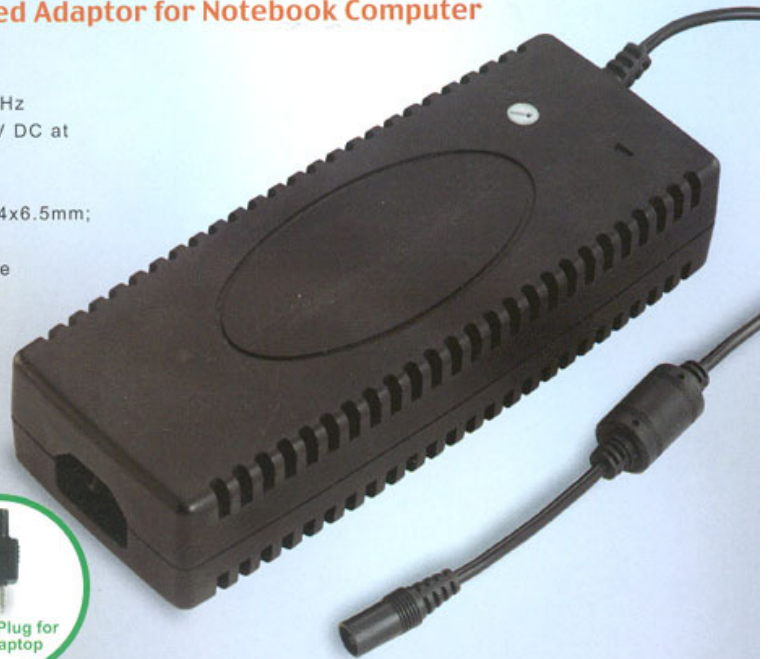

Switching Mode Universal Regulated Adaptor for Notebook Computer

SPECIAL FEATURES

- Universal input voltage : 100-240VAC ~ 50/60Hz
- 7 Output selections : 15V/ 16V/ 18V/ 19V/ 20V DC at 6A regulated; 22V/ 24V DC at 5A regulated
- Output with 5 detachable plugs
- include 5 coaxial connectors (1.7x4.75mm; 1.4x6.5mm; 5.5x2.1mm; 5.5x2.5mm; 6.3x3.0mm)
- Stabilized output, low ripple & low interference
- Short circuit & overload protection
- High efficiency and low energy consumption
- Power LED monitor to indicate proper output setting
- Packing : Each in a giftbox
- Export packing : 10pcs per inner box, 20pcs per export carton.



INPUT PLUG:

EUROPEAN TYPE WITH EARTH	AMERICAN TYPE WITH EARTH	AUSTRALIAN TYPE WITH EARTH	UK TYPE WITH 13A FITTED PLUG
			



VANSON VANSON ELECTRONICS LTD.

MODEL SMP-70W

SWITCHING MODE UNIVERSAL REGULATED ADAPTOR FOR NOTEBOOK COMPUTER

(Specially designed for use with most of the notebook computers & the personal digital electronic devices)

Features:

- Universal input voltage : 100-240V AC-50/60Hz
- 7 Output selection : 15V / 16V / 18V / 19V / 20V DC at 3.5A Regulated;
22V / 24V DC at 2.9A Regulated
- Output with 5 detachable plugs(Model WP-5) include 5 coaxial connectors:
(1.7x4.75mm; 1.4x6.5mm; 5.5x2.1mm; 5.5x2.5mm & 6.3x3.0mm)
- Stabilized output, low ripple & low interference.
- Short circuit & overload protection.
- High efficiency and low energy consumption.
- Power LED monitor to indicate proper output setting.

- *Packing : Each in a giftbox.*
- *Export packing : 10pcs per inner box,
20pcs per export carton.*



MEASUREMENT		N.W.	G.W.	QTY IN 20FT CONTAINER	
47.5 X 33.5 X 36.0CM	0.057CBM	2.02CU.FT.	18.0KG	19.5KG	10000PCS



ALIMENTACIÓN COMPACTA CONMUTADA – SALIDA: DE 15 A 24VDC - 150W

Referencia: PSSMV13



Características

- con 9 conectores DC desmontables
- para ordenadores portátiles & aparatos electrónicos digitales
- salida estabilizada, bajo rizado y poca interferencia
- muy eficaz y bajo consumo
- LED de alimentación

Especificaciones

- alimentación: 100 ~ 240Vac
- potencia: 150W máx.
- tensiones de salida seleccionables: 15 - 16 - 18 - 19 - 20VDC (6A estabilizado) / 22 - 24VDC (5A estabilizado)
 - 15/16Vdc - 8.5A (máx. 136VA)
 - 18/19Vdc - 8A (máx. 152VA)
 - 20Vdc - 7.5A (máx. 150VA)
 - 22Vdc - 6.5A (máx. 143VA)
 - 24Vdc - 6A (máx. 144VA)
- dimensiones: 185 x 60 x 40mm
- conectores:
 - conectores acodados: 2 uds.
 - (A): ID : 2.1mm, OD : 5.5mm
 - (B): ID : 2.5mm, OD : 5.5mm
 - conectores rectos: 7 uds.
 - (C): ID : 1.7mm, OD : 4.75mm
 - (D): ID : 3.0mm, OD : 6.3mm
 - (E): ID : 1.4mm, OD : 6.5mm
 - (F): conector Dell especial, 3 polos
 - (I): ID : conector estéreo 2.5mm, OD : 6mm
 - (J): ID : conector estéreo 3.5mm, OD : 9.3mm
 - (K): ID : 0.6mm, OD : 7.4mm